M SERIES DRUM FILTER CART



All-In-One Convenience!

All-in-one convenience is what the DC-M Drum filter cart is all about. The simple practicality of this cart allows the operator to dispense and filter oil out of a 55 gallon drum on wheels. A magnetic kickstand adds stability and ensures the drum will not tip over. The drum filter cart has ability to filter oil viscosities up to 600cSt (ISO VG 680) at 100F within ambient temperature ranges of -15F to 150F. All Y2K products are 100% customizable upon request.

Typical Applications

- · Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Dispensing new oil

Y2K FLUID POWER



M SERIES DRUM FILTER CART

Don't see the options you need? Contact Y2K at 1(888) 925-8882 or sales@y2kfluidpower.com

Performance:

For filtering mineral and synthetic based oils (hydraulic oils, gear oils and turbine oils) with a maximum operating viscosity range of ISO VG 680 (3000ssu/648cSt) at 100°F within ambient temperature ranges of -15°F to 150°F.

Standard Features:

Materials:

- Frame: Custom steel with magnetic kickstand
- · Paint: Multiple color options available
- Motor: 1HP, 115vac, 60Hz or Pneumatic
- · Filter Heads: Low pressure, aluminum heads
- Pump: Aluminum gear pump. Available in 2, 5 and 10 GPM
- Connections: Various quick connect options available
- Hoses: 7ft. Clear PVC, steel reinforced hose or hydraulic hose
- Power Switch: Sealed On/Off Power Switch

Filter Indicators:

 Pop up indicator triggers at 50psid when elements need to be changed.

Pump Relief:

Opens at 150psi

Weight:

Approx. 145lbs (will vary depending on options)

Dimensions:

Approx. 23"L x 21"W x 59"H


Replacement Elements:

Part Number	BETA Rating	Desired Cleanliness Level (ISO Code)
P1068	ß3(c)=1000	14/12/9 - 13/11/8
P1069	ß6(c)=1000	17/15/12 - 14/12/9
P1070	ß10(c)=1000	18/16/13 - 17/15/12
P1071	ß25(c)=1000	21/19/16 - 20/18/15
P1072WR	Water Removal	

All M Series elements measure 5" x 10".

Components:

Item Number	Description	Qty.
1	Heavy Duty Drum Cart	1
2	Motor	1
3	Gear Pump	1
4	Filter Head	2
5	Filter Element	2
6	Filter Indicator	2
7	Sample Port	2
8	Switch On/Off	1
9	Cord Wrap Area	1
10	Kick Stand	1

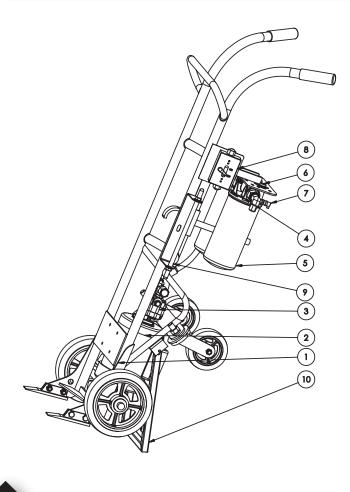

Y2K FLUID POWER

